



Test Report No.: FV160525N002



TEST REPORT


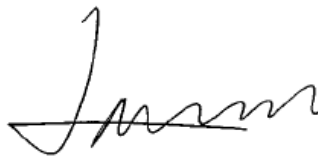
Applicant	Laurel at Sunset, Inc.
Address	9641 Owensmouth Ave, Chatsworth, CA 91311, United States

Manufacturer or Supplier	DONGGUAN SNDWAY ELECTRONIC CO., LTD
Address	4th floor, Building A2, Ludipu No. 37, Huaide, Humen 523926, Dongguan, Guangdong, China
Product	3Dazer
Brand Name	3Dazer
Model	DZ-ID1601
Additional Model & Model Difference	N/A
Date of tests	May 25, 2016 ~ Jun. 03, 2016

The submitted sample of the above equipment has been tested for according to the requirements of the following standards:

FCC Part 15, Subpart B, Class B

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

Tested by Ryan Lu Project Engineer / EMC Department	Approved by Madison Luo Supervisor / EMC Department
	 Date: Jun. 03, 2016

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

Table of Contents

RELEASE CONTROL RECORD	3
1 SUMMARY OF TEST RESULTS	4
1.1 MEASUREMENT UNCERTAINTY	4
2 GENERAL INFORMATION	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF TEST MODES	6
2.3 DESCRIPTION OF SUPPORT UNITS	6
3 EMISSION TEST	6
3.1 CONDUCTED EMISSION MEASUREMENT.....	7
3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	7
3.1.2 TEST INSTRUMENTS.....	7
3.1.3 TEST PROCEDURE.....	8
3.1.4 DEVIATION FROM TEST STANDARD.....	8
3.1.5 TEST SETUP.....	9
3.1.6 EUT OPERATING CONDITIONS	9
3.1.7 TEST RESULTS	10
3.2 RADIATED EMISSION MEASUREMENT.....	12
3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT	12
3.2.2 TEST INSTRUMENTS.....	14
3.2.3 TEST PROCEDURE.....	15
3.2.4 DEVIATION FROM TEST STANDARD.....	16
3.2.5 TEST SETUP.....	17
3.2.6 EUT OPERATING CONDITIONS	17
3.2.7 TEST RESULTS	18
4 PHOTOGRAPHS OF THE TEST CONFIGURATION	20
5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	22



**BUREAU
VERITAS**

Test Report No.: FV160525N002

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FV160525N002	Original release	Jun. 03, 2016

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart B			
Standard Section	Test Item	Result	Remark
FCC Part 15, Subpart B, Class B	Conducted test	PASS	Meets limits minimum passing margin is -17.07 dB at 0.15900 MHz
	Radiated Emission Test (30MHz ~ 1GHz)	PASS	Meets limits minimum passing margin is - 3.42 dB at 649.96 MHz

1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emission test	0.15MHz ~ 30MHz	+/- 2.70 dB
Radiated emissions	30MHz ~ 1GHz	+ /- 3.62 dB



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	3Dazer
MODEL NO.	DZ-ID1601
ADDITIONAL MODE	N/A
POWER SUPPLY	DC 5V from USB or DC 3.7V from battery
CABLE SUPPLIED	N/A
THE HIGHEST OPERATING FREQUENCY	Below 108MHz

NOTE:

1. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.
2. For a more detailed features description, please refer to the manufacturer's specifications or the User's Manual.
3. Please refer to the EUT photo document (Reference No.:160525N002) for detailed product photo.

2.2 DESCRIPTION OF TEST MODES

The EUT was tested under the following modes the final worst mode was marked in boldface and recorded in this report.

- ◆ For Conducted Emission Test

Model No.	Test Voltage
Charging	DC 5V from USB

- ◆ For Radiated Emission Test

Model No.	Test Voltage
Normal Working	DC 3.7V from battery
Charging	DC 5V from USB

2.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an dependent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	DELL	E6420	9H12FS1	N/A
2	Notebook	Lenovo	E430	MP-0DN27	N/A
3	Printer	HP	hp LaserJet 1300	CNSJF75989	N/A
4	Printer	Lenovo	LJ2200L	LP02857415 48001408	N/A
5	Mouse	HP	CS105	N/A	N/A

NO.	DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	AC Line: Unshielded, Detachable 1.0m, DC Line: Unshielded, Detachable 2.0m
2	AC Line: Unshielded, Detachable 1.5m, DC Line: Unshielded, Detachable 1.5m
3	AC Line: Unshielded, Detachable 1.8m, USB Line: Unshielded, Detachable 1.8m
4	AC Line: Unshielded, Detachable 1.5m, USB Line: Unshielded, Detachable 1.5m
5	USB Line: Unshielded, Detachable 1.8m



3 EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.107)

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

- NOTES:**
- (1) The lower limit shall apply at the transition frequencies.
 - (2) The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 - (3) All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101588	Jan. 22,16	Jan. 21,17
Artificial Mains Network	Rohde&Schwarz	ENV216	101173	Mar. 04,16	Mar. 03,17
Artificial Mains Network	Rohde&Schwarz	ESH3-Z5	100317	Apr. 05,16	Apr. 04,17
Voltage probe	SCHWARZBECK	TK 9421	TK 9421-176	Jan. 08,16	Jan. 07,17
Test software	ADT	ADT_Cond _V7.3.7	N/A	N/A	N/A

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in shielding room 553.



3.1.3 TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4:2014 (section 7).

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150 kHz to 30 MHz was searched. Emission levels under (Limit – 20dB) were not recorded.

NOTE:


1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. Margin value = Emission level - Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.



3.1.5 TEST SETUP

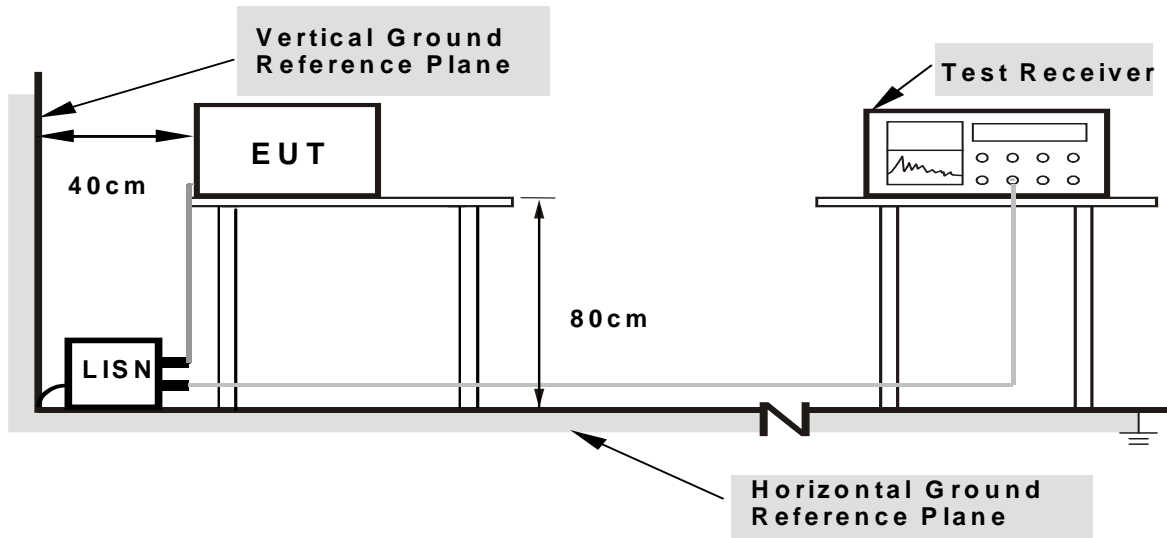

- Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.

3.1.6 EUT OPERATING CONDITIONS

- Turned on the power of all equipment.
- EUT was operated according to the type description in manufacturer's specifications or the User's Manual.




3.1.7 TEST RESULTS

TEST MODE	Normal working	6DB BANDWIDTH	9 kHz
TEST VOLTAGE	DC 5V From USB	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	21deg. C, 57% RH	TESTED BY	David

No.	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15924	10.02	42.79	27.97	52.81	37.99	65.50	55.50	-12.69	-17.51
2	0.18825	10.02	37.88	24.44	47.90	34.46	64.11	54.11	-16.21	-19.65
3	0.21291	10.02	36.30	22.40	46.32	32.42	63.09	53.09	-16.77	-20.67
4	3.68025	10.15	27.95	20.20	38.10	30.35	56.00	46.00	-17.90	-15.65
5	4.40475	10.14	28.44	21.10	38.58	31.24	56.00	46.00	-17.42	-14.76
6	19.62150	10.27	29.15	16.67	39.42	26.94	60.00	50.00	-20.58	-23.06


REMARKS: The emission levels of other frequencies were very low against the limit.

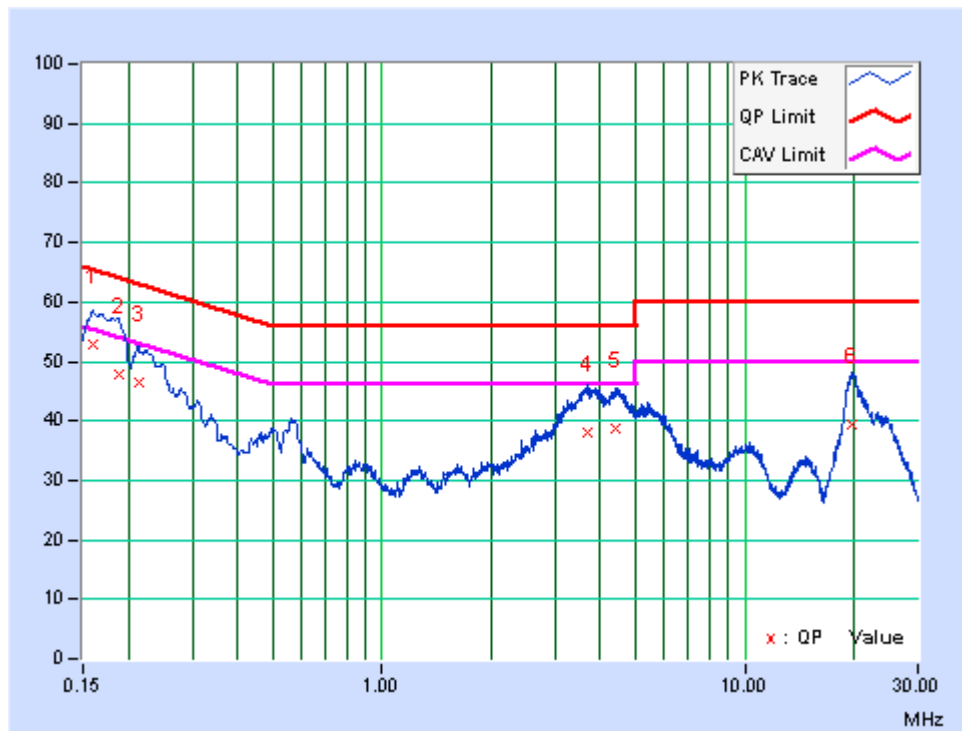

TEST MODE	Normal working	6DB BANDWIDTH	9 kHz
TEST VOLTAGE	DC 5V From USB	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	21deg. C, 57% RH	TESTED BY	David

No.	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15900	9.82	43.78	28.63	53.60	38.45	65.52	55.52	-11.92	-17.07
2	0.18076	9.82	40.86	27.28	50.68	37.10	64.45	54.45	-13.77	-17.35
3	0.24231	9.81	33.30	19.65	43.11	29.46	62.02	52.02	-18.91	-22.56
4	3.61889	9.90	27.75	19.77	37.65	29.67	56.00	46.00	-18.35	-16.33
5	4.47450	9.92	28.52	21.24	38.44	31.16	56.00	46.00	-17.56	-14.84
6	19.74525	10.18	32.10	19.57	42.28	29.75	60.00	50.00	-17.72	-20.25

REMARKS: The emission levels of other frequencies were very low against the limit.

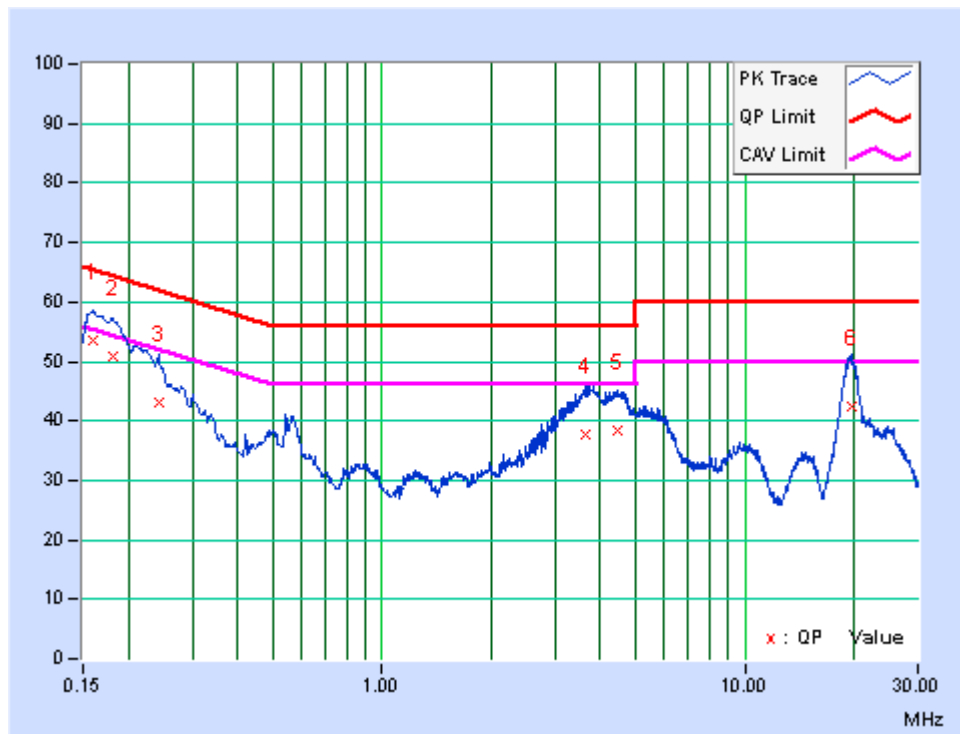



3.2 RADIATED EMISSION MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

TEST STANDARD: FCC Part 15, Subpart B (Section: 15.109)

Emissions radiated outside of the specified bands, shall be according to the general radiated limits as following:

Radiated Emissions Limits at 10 meters (dB μ V/m)				
Frequencies (MHz)	FCC 15B/ ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
30-88	39	29.5	40	30
88-216	43.5	33.1		
216-230	46.4	35.6		
230-960			47	37
960-1000	49.5	43.5	Not defined	Not defined
1000-3000	Avg: 49.5	Avg: 43.5		
Above 3000	Peak: 69.5	Peak: 63.5	Not defined	Not defined

Radiated Emissions Limits at 3 meters (dB μ V/m)				
Frequencies (MHz)	FCC 15B / ICES-003, Class A	FCC 15B / ICES-003, Class B	CISPR 22, Class A	CISPR 22, Class B
30-88	49.5	40	50.5	40.5
88-216	54	43.5		
216-230	56.9	46		
230-960			57.5	47.5
960-1000	60	54	Avg: 56 Peak: 76	Avg: 50 Peak: 70
1000-3000	Avg: 60	Avg: 54		
Above 3000	Peak: 80	Peak: 74	Avg: 60 Peak: 80	Avg: 54 Peak: 74



FREQUENCY RANGE OF RADIATED MEASUREMENT (For unintentional radiators)

Highest frequency generated or Upper frequency of measurement used in the device or on which the device operates or tunes (MHz)	Range (MHz)
Below 1.705	30
1.705 – 108	1000
108 – 500	2000
500 – 1000	5000
Above 1000	5th harmonic of the highest frequency or 40 GHz, whichever is lower

- Note: (1) The lower limit shall apply at the transition frequencies.
(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).
(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



3.2.2 TEST INSTRUMENTS

FREQUENCY RANGE BELOW 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 05,16	Apr. 04,17
Bilog Antenna	Teseq	CBL 6111D	30643	Jul. 16, 15	Jul. 15, 16
Amplifier	Burgeon	BPA-530	100220	Apr. 05,16	Apr. 04,17
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Mar. 12,16	Mar. 11,17
Test software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A

FREQUENCY RANGE ABOVE 1GHz

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Apr. 05,16	Apr. 04,17
Broadband Preamplifier	SCHWARZBECK	BBV9718	305	Mar. 09,16	Mar. 08,17
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 11,15	Nov. 10,16
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A

- NOTES:**
1. The test was performed at 966 Chamber (a 3m Semi-anechoic chamber).
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 3. The FCC Site Registration No. is 502831.

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	ETS-Lindgren	3117	00062558	May 30,14	May 29,16

- NOTES:**
1. The test was performed at 966 Chamber (a 3m Semi-anechoic chamber).
 2. The calibration interval of the above test instruments is 24 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 3. The FCC Site Registration No. is 502831.

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170242	Mar. 12,16	Mar. 11,17

- NOTES:**
1. The test was performed at 966 Chamber (a 3m Semi-anechoic chamber)..
 2. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 3. The FCC Site Registration No. is 502831.

3.2.3 TEST PROCEDURE

The basic test procedure was in accordance with ANSI C63.4:2014 (section 12).

<Frequency Range below 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from 1 meter to 4 meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1GHz.

NOTE:

1. The resolution bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
3. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier)
4. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB) (if the raw value contains the amplifier)
5. Margin value = Emission level – Limit value

<Frequency Range above 1GHz>

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna can be varied from one meter-to four meters, the height of adjustment depends on the EUT height and the antenna 3dB beamwidth both, to detect the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. The bore sight should be used during the test above 1GHz.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test receiver/spectrum was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.

NOTE:

1. The resolution bandwidth is 1MHz and video bandwidth of test receiver/spectrum analyzer is 3MHz for Peak detection at frequency above 1GHz. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz for Average detection (AV) at frequency above 1GHz.
2. For measurement of frequency above 1000 MHz, the EUT was set 3 meters away from the receiver antenna.
3. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
4. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) (if the raw value not contains the amplifier)
5. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB) – Amplifier Gain(dB) (if the raw value contains the amplifier).
6. Margin value = Emission level – Limit value


3.2.4 DEVIATION FROM TEST STANDARD

No deviation.




3.2.5 TEST SETUP

<Frequency Range below 1GHz>

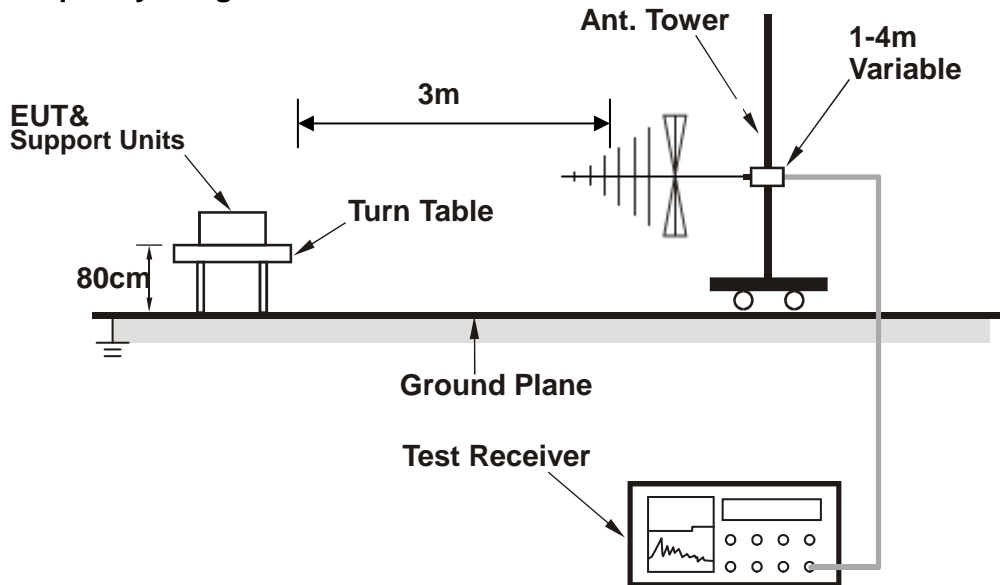

<Frequency Range above 1GHz>

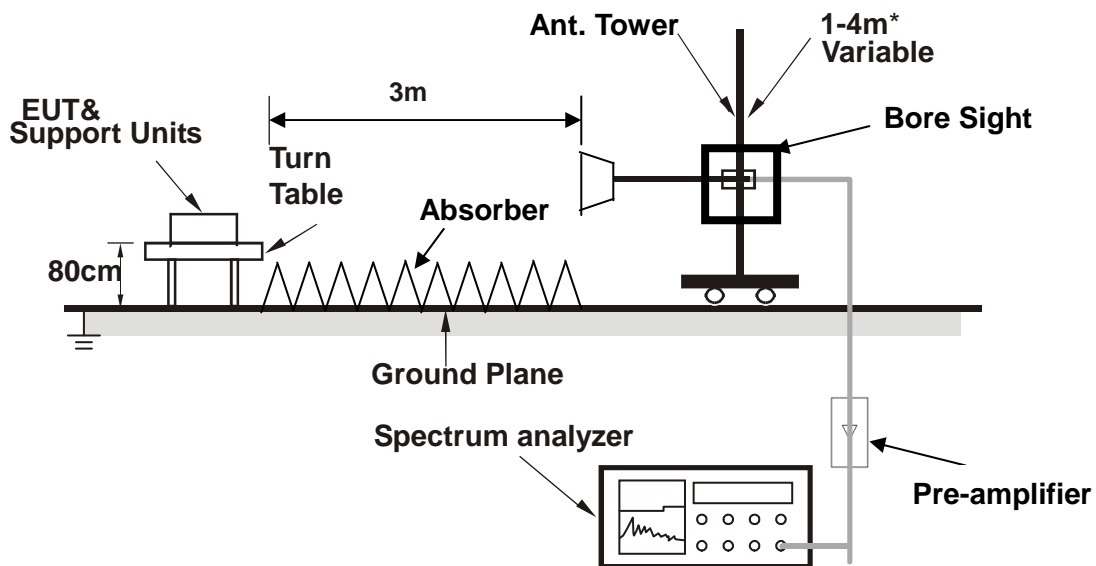

* : depends on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

3.2.6 EUT OPERATING CONDITIONS

- a. Turn on the power supply of the EUT.
- b. EUT was operated according to the type description in manufacturer's specifications or the User's Manual.




3.2.7 TEST RESULTS

TEST MODE	Normal working	FREQUENCY RANGE	30-1000MHz
TEST VOLTAGE	DC 3.7V From Battery	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 51% RH	TESTED BY: Eric Fang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	30.00	-12.31	27.66	15.35	40.00	-24.65	100	0
2	119.97	-17.87	29.69	11.82	43.50	-31.68	100	0
3	145.28	-17.75	29.08	11.33	43.50	-32.17	100	0
4	236.65	-17.54	30.66	13.12	46.00	-32.88	100	0
5	276.01	-15.08	30.11	15.03	46.00	-30.97	100	0
6	360.36	-12.21	31.15	18.94	46.00	-27.06	100	0


- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
 2. Negative sign (-) in the margin column signify levels below the limit.
 3. Frequency range scanned: 30MHz to 1000MHz.
 4. Only emissions significantly above equipment noise floor are reported.

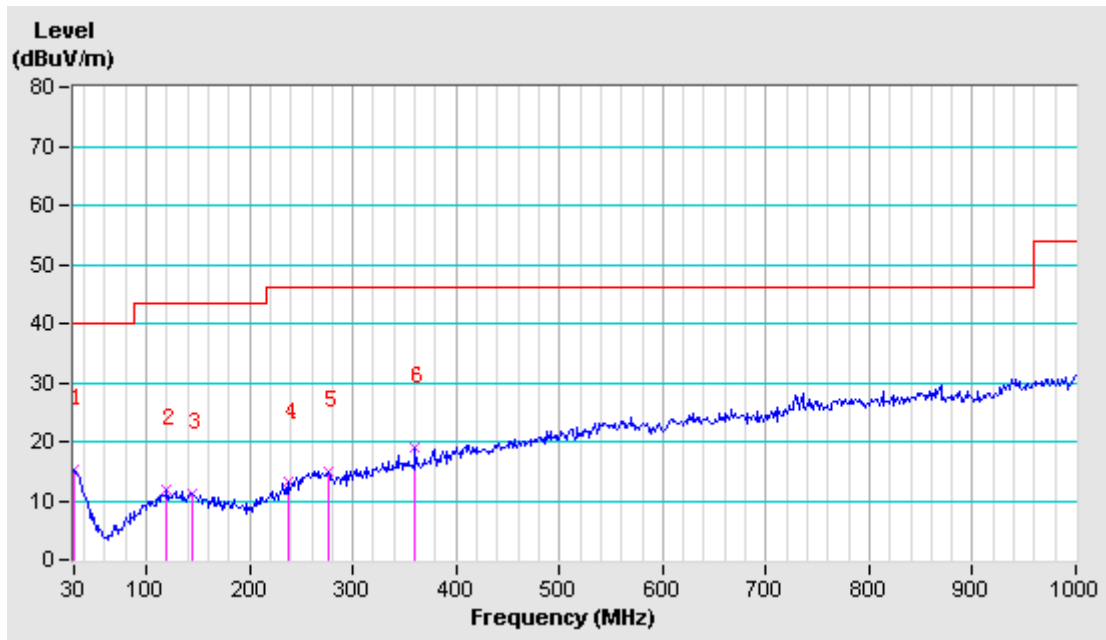

TEST MODE	Normal working	FREQUENCY RANGE	30-1000MHz
TEST VOLTAGE	DC 3.7V From Battery	DETECTOR FUNCTION & RESOLUTION BANDWIDTH	Quasi-Peak, 120kHz
ENVIRONMENTAL CONDITIONS	25deg. C, 51% RH	TESTED BY: Eric Fang	



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Correction Factor (dB/m)	Raw Value (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (cm)	Table Angle (Degree)
1	129.81	-17.66	37.71	20.05	43.50	-23.45	100	0
2	389.88	-11.35	33.32	21.97	46.00	-24.03	100	0
3	516.41	-7.51	31.38	23.87	46.00	-22.13	100	0
4	569.83	-5.39	30.91	25.52	46.00	-20.48	100	0
5	619.03	-4.94	32.90	27.96	46.00	-18.04	100	0
6	649.96	-4.62	47.20	42.58	46.00	-3.42	100	0

- REMARKS:**
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table.
 2. Negative sign (-) in the margin column signify levels below the limit.
 3. Frequency range scanned: 30MHz to 1000MHz.
 4. Only emissions significantly above equipment noise floor are reported.


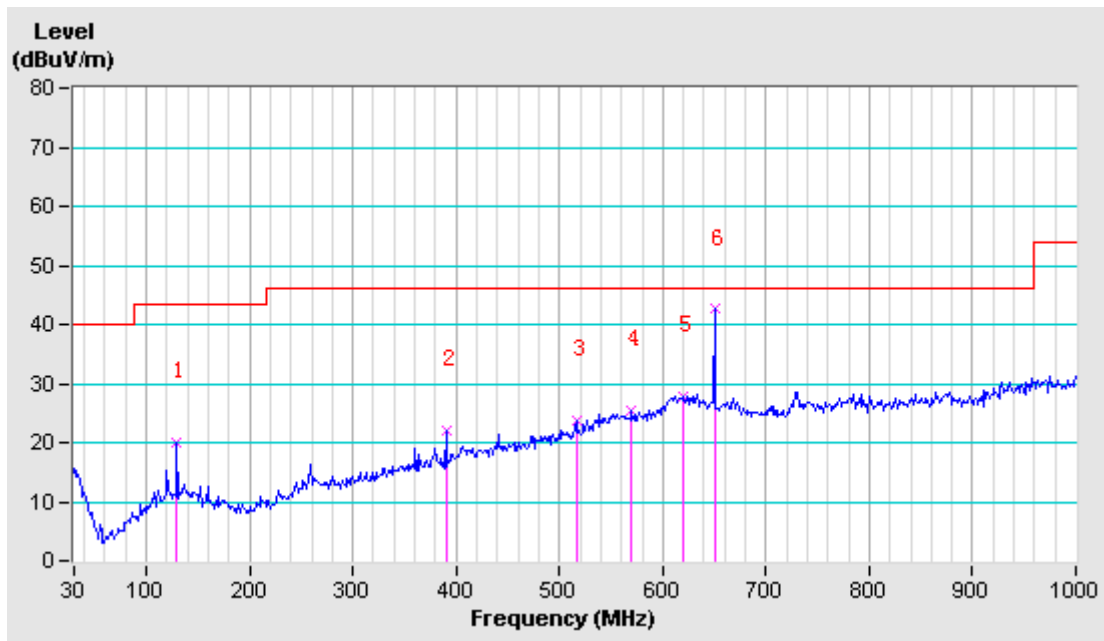


4 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST

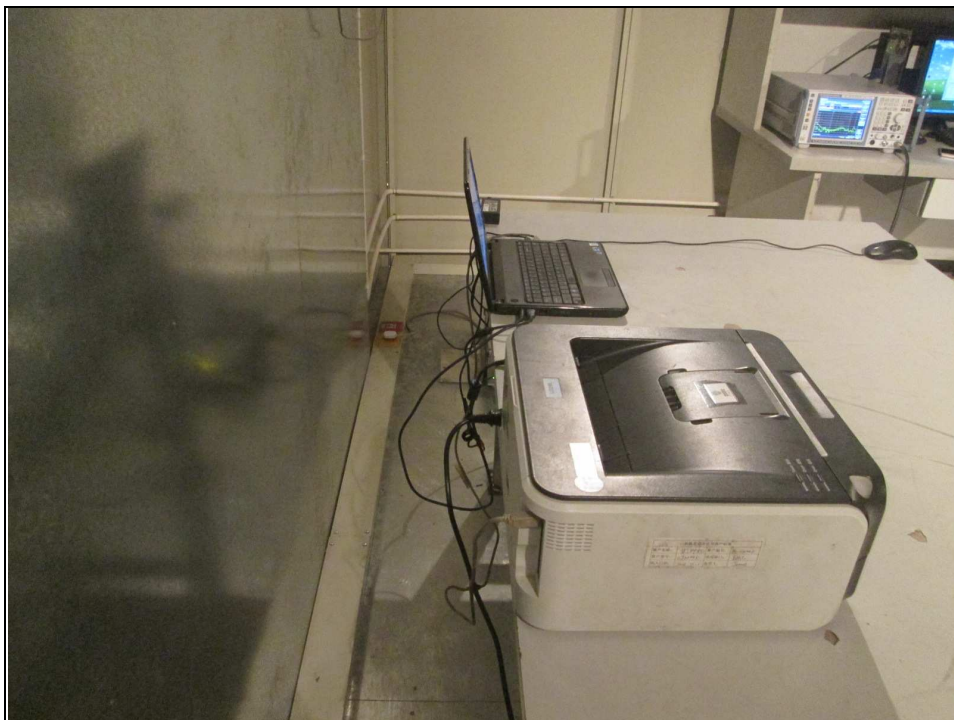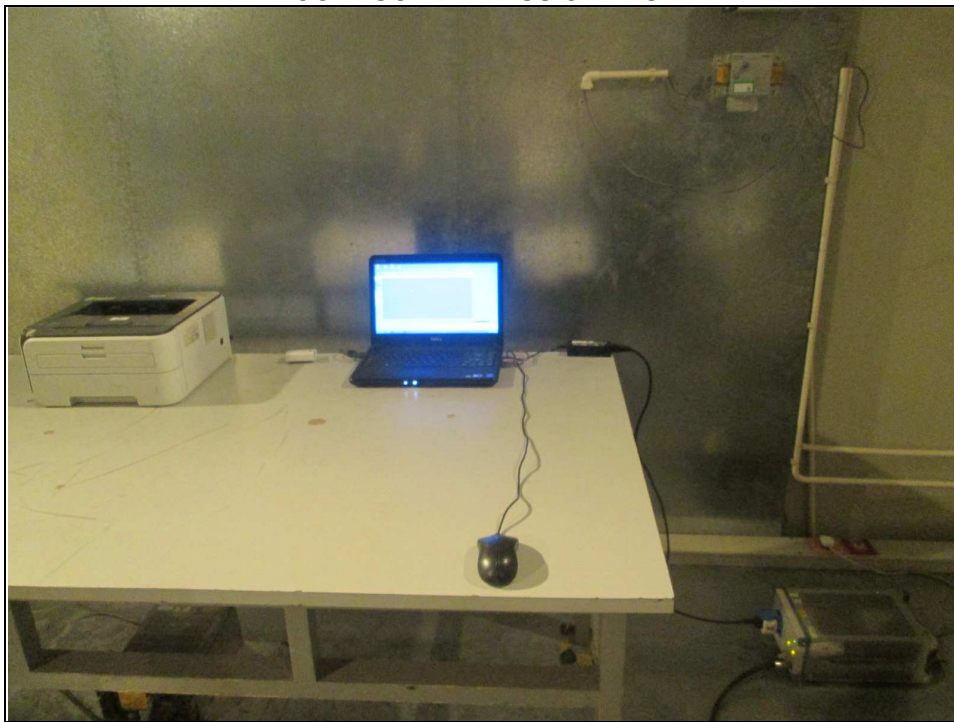

RADIATED EMISSION TEST

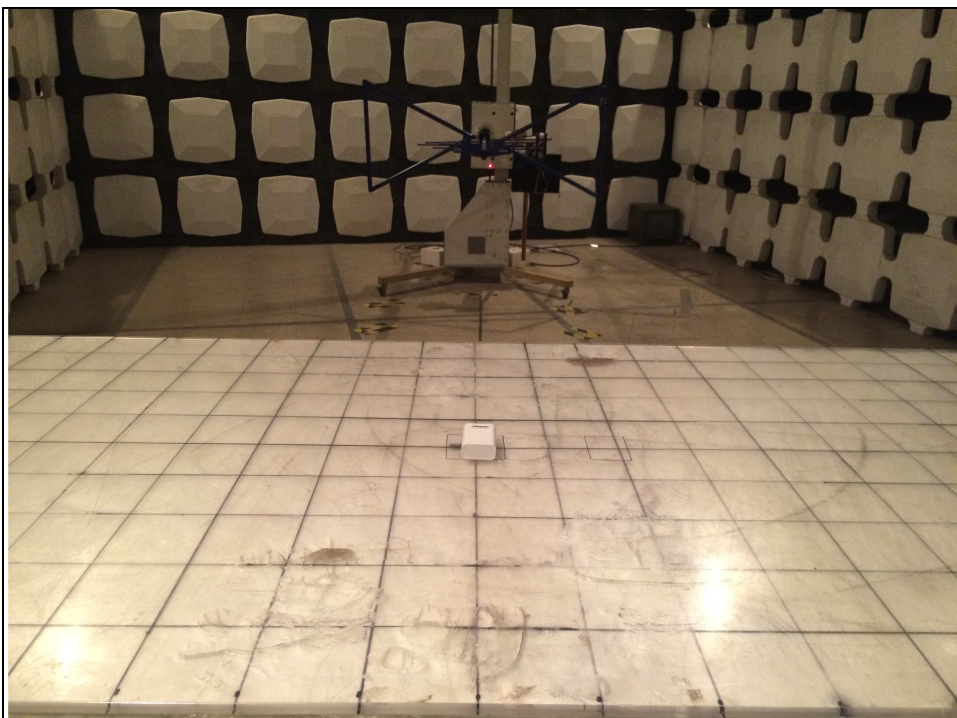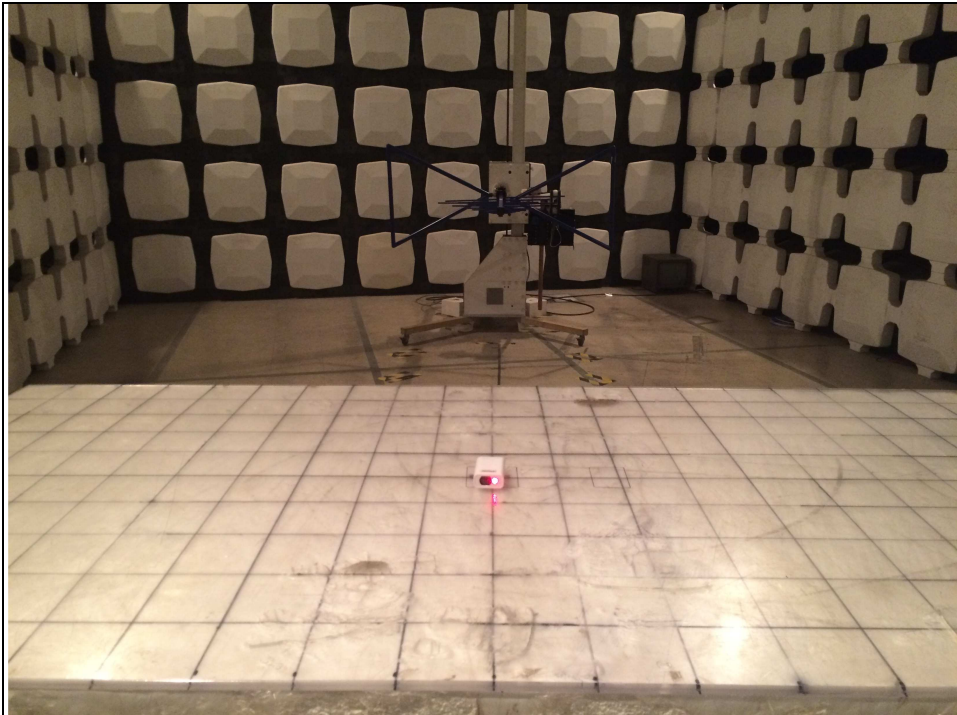



**BUREAU
VERITAS**

Test Report No.: FV160525N002

5 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications were made to the EUT by the lab during the test.

---END---